

## Dymonic® FC

### Fast Curing, Low Modulus, Silane End-Capped, Polyurethane Hybrid Sealant

#### Product Description

Dymonic® FC is a low modulus, one-component, moisture-cure, polyurethane hybrid sealant. Formulated with proprietary silane end-capped polymer technology, Dymonic FC provides the best performance characteristics of polyurethane and silicone sealants.

#### Basic Uses

Dymonic FC is a durable, flexible, sealant that offers excellent performance in moving joints and exhibits tenacious adhesion once fully cured. Typical applications for Dymonic FC include expansion and control joints, precast concrete panel joints, perimeter caulking (windows, door, panels), EIFS, aluminum, masonry & vinyl siding.

#### Features and Benefits

Dymonic FC is fast curing with a skin time of 60 minutes and a tack-free time of 3-4 hours to significantly reduce dirt pickup. It will not green crack due to early movement and has an exceptional movement capability of +/- 35%. Dymonic FC is also low VOC, paintable and will not crack or craze under UV exposure.

#### Colors

Almond, Beige, Black, Anodized Aluminum, Aluminum Stone, Buff, Dark Bronze, Gray, Limestone, Off White, Redwood Tan, Stone, White, Natural Clay, Bronze and Ivory.

#### Packaging

10.1 oz (300 ml) cartridges; 20 oz (600 ml) sausages; 2 (7.6 L), 3 (11.4 L) and 5 (19 L) gallon pails.

#### Coverage Rates

308 linear feet of joint per gallon for a 1/4" X 1/4" joint. For specific coverage rates that include joint size, and usage efficiencies, visit our website usage calculator at [www.tremcosealants.com](http://www.tremcosealants.com).

#### Applicable Standards

Dymonic FC meets or exceeds the requirements of the following specifications

- ASTM C 920 Type S, Grade NS, Class 35, Use NT, M, A, and O
- U.S. Federal Specification TT-S-00230C, Class A, Type II
- CAN/CGSB-19.13-M87

#### Fire-rated Systems

FF-D-1063, FW-D-1059, HW-D-1054, WW-D-1054.

#### Joint Design

Dymonic may be used in any vertical or horizontal joint designed in accordance with accepted architectural/engineering practices. Joint width should be 4 times anticipated movement, but not less than 1/4" (6.4mm).

#### Joint Backing


Closed cell or reticulated polyethylene backer rod is recommended as joint backing to control sealant depth and to ensure intimate contact of sealant with joint walls when tooling. Where depth of joint will prevent the use of backer rod, an adhesive backed polyethylene tape (bond breaker tape) should be used to prevent three-sided adhesion. All backing should be dry at time of sealant application.

### TYPICAL PHYSICAL PROPERTIES

Rheological Properties (ASTM C 639):	non-sag (NS), 0" of sag in channel
Extrusion Rate (ASTM C 1183):	93.1 ml/min.
Hardness Properties (ASTM C 661):	25
Weight Loss (ASTM C 1246):	Pass
Skin Time (no applicable test method)	1 hour
Tack Free Time (ASTM C 679):	3-4 hours
Stain & Color Change (ASTM C 510):	No visible color change/No stain
Adhesion-in-Peel (ASTM C 794):	Aluminum 20-25 pli (89-112N) Concrete 18-22 pli (80-98N) No Adhesion Loss
Effects of Accelerated Aging (ASTM C 793):	Pass
Movement Capability:	+/- 35%

## Sealant Dimensions

W = Sealant width, D = Sealant depth, C = Contact area.

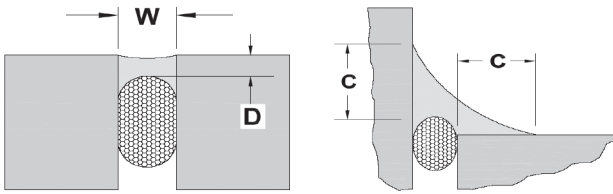

**EXPANSION JOINTS** - The minimum width and depth of any sealant application should be 1/4" by 1/4" (6mm by 6mm).

The depth (D) of sealant may be equal to the width (W) of joints that are less than 1/2" wide. For joints ranging from 1/2" to 1" (13mm to 25mm) wide, the sealant depth should be approximately one-half of the joint width.

The maximum depth (D) of any sealant application should be 1/2" (13mm). For joints that are wider than 1" (25mm) contact Tremco's Technical Service Department, or your local Tremco field representative.

**WINDOW PERIMETERS** – For fillet beads, or angle beads around windows and doors, the sealant should exhibit a minimum surface contact area (C) of 1/4" onto each substrate.

## Surface Preparations

Surfaces must be sound, clean, and dry. All release agents, existing waterproofing, dust, loose mortar, laitance, paints, or other finishes must be removed. This can be accomplished with a thorough wire brushing, grinding, sandblasting, or solvent washing, depending on the contamination.

Tremco recommends that surface temperatures be 40°F (5°C) or above at the time the sealant is applied. If sealant must be applied in temperatures below 40°F, please refer to the Tremco Guide for Applying Sealants in Cold Weather that can be found on our website at [www.tremcosealants.com](http://www.tremcosealants.com).

## Priming

Where deemed necessary, use Tremco Primer #1 or TREMPprime Silicone Porous Primer for porous surfaces, and TREMPprime Non-Porous Primer for metals or plastics. Dymonic FC typically adheres to common construction substrates without primers; however, Tremco always recommends that a mock-up or field adhesion test be performed on the actual materials being used on the job to verify the need for a primer. A description of the field adhesion test can be found in appendix X1 of ASTM C 1193, Standard Guide for Use of Joint Sealants.

## Application

Dymonic FC is easy to apply with conventional caulking equipment. Ensure that the backer rod is friction fitted properly and any primers have been applied. Fill the joint completely with a proper width-to-depth ratio and tool to insure intimate contact of sealant with joint walls. Dry tooling is always preferred, although xylene can be used in limited amounts to slick the spatula if needed.

For a cleaner finish, mask the sides of the joint with tape prior to filling.

## Cure Time

Dymonic FC generally cures at a rate of 3/32" per day at 75°F (24°C) and 50% relative humidity. Dymonic FC will skin in 1 hour and be tack free in 3-4 hours. The cure time will increase as temperatures and/or humidity decrease. A good rule of thumb is one additional day for every 10°F decrease in temperature.

## Clean up

Excess sealant and smears adjacent to the joint interface can be carefully removed with xylene or mineral spirits before the sealant cures. Any utensils used for tooling can also be cleaned with xylene or mineral spirits.

## Limitations

- Do not apply over damp or contaminated surfaces.
- Use with adequate ventilation.
- Do not use under polyurethane deck coatings unless the sealant is fully cured.
- Always utilize the accompanying MSDS for information on Personal Protective Equipment (PPE), and health Hazards.

## Warranty

Tremco warrants its sealants to be free of defects in materials, but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to Tremco sealants. Tremco's sole obligation shall be, at its option, to replace or refund the purchase of the quantity of Tremco sealant proven to be defective and Tremco shall not be liable for any loss or damage.



# Dymonic<sup>®</sup> FC Standard Colors

MTO/custom colors & alternate packaging available

	
ALMOND	
	
ALUMINUM STONE	
	
ANODIZED ALUMINUM	
	
BEIGE	
	
BLACK	
	
BRONZE	
	
BUFF	
	
DARK BRONZE	
	
GRAY	
	
LIMESTONE	
	
OFF WHITE	
	
REDWOOD TAN	
	
STONE	
	
WHITE	
	
NATURAL CLAY	

This guide only offers a general representation of our color offering. Colors viewed on a computer screen and then printed will vary and will never be an exact representation of the actual pigment. When matching is critical, please refer to our color card or sample color strips.