


PRODUCT DATA

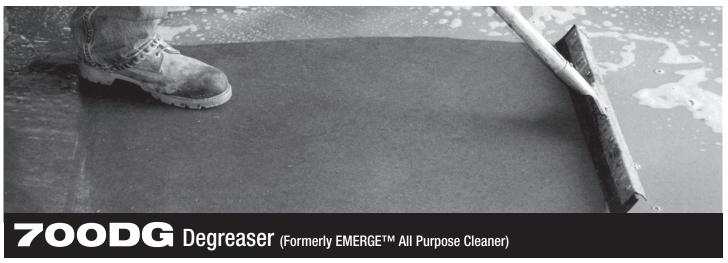

Take all the guess work out of deciding on the best surface degreaser! Specially formulated to work with all **BLUE BEAR** products, **700DG** is super concentrated and powerful enough to clean the dirtiest, toughest, and grimiest of projects. **700DG** is a great product to help you easily finish clean-up after removing mastic, paint, or other coatings and adhesives.

Mixing:

- **1** For general cleaning of hard surfaces, mix 1 gallon of water with 4 oz of **700DG**.
- **2** Soak dirty tools in a soaking tray or bucket of diluted **700DG** to keep tools clean for the next job. 1:1 mixing ratio.
- **3** For use with floor scrubbing machines, mix 1 part water to 1 part **700DG**. 1:1 mixing ratio.

Application:

Apply mixed **700DG** freely to the floor or hard surface. Scrub surface to agitate and loosen oils, grease, dirt and grime.

Clean-Up:

Pick-up residue mixed **700DG** with a mop, squeegee or commercial vacuum. Rinse or mop surface clean with water.

Biodegradable:

Meets or exceeds ASTM standards

Warnings:

May be harmful if swallowed. Keep out of reach of children.

At full concentration:

Causes skin irritation. Causes eye irritation. May cause respiratory irritation.

Flash Point:

Will not burn.

pH Level:

12.18 pH of 1/10 wt/wt solution in soft water

VOC (Volatile Organic Compounds):

<0.5%, 0.088 lb/g, 10.53 g/l California and OTC Compliant

Ingredients:

Water, Sodium Metasilicate, Surfactants

NON-EMERGENCY
Call: 800.538.5069
www.franmar.com
CHEMICAL EMERGENCY:
Spill, Leak, Fire, Exposure, or Accident
Call CHEMTREC Day or Night
USA and Canada: 800.242.9300

CCN717946 or +1 703.527.3887

(Collect Calls Accepted)

Franmar

PO Box 5565 Bloomington IL 61702

Rev. 3/6/2015

Mixing:

- 1. For general cleaning of hard surfaces, mix 1 gallon of water with 4 oz. of 700DG.
- 2. Soak dirty tools in a soaking tray or bucket of diluted 700DG to keep tools clean for the next job.
- 1:1 mixing ratio.
- 3. For use with floor scrubbing machines, mix 1 part water to 1 part 700DG. 1:1 mixing ratio.

Application:

Apply mixed 700DG freely to the floor or hard surface. Scrub surface to agitate and loosen oils, grease, dirt, and grime.

Clean Up:

Pick up 700DG and residue with a mop, squeegee, or commercial vacuum. Rinse or mop surface clean with water.

Safe for use on: Concrete, masonry, wood, and metal

pH Level: 12.18

VOC (Volatile Organic Compounds) <0.5%, 0.088 lb/g, 10.53 g/l